Hand & Eye

Super White Medium Instructions & Safety Information EU/USA

Dimensions- Side view

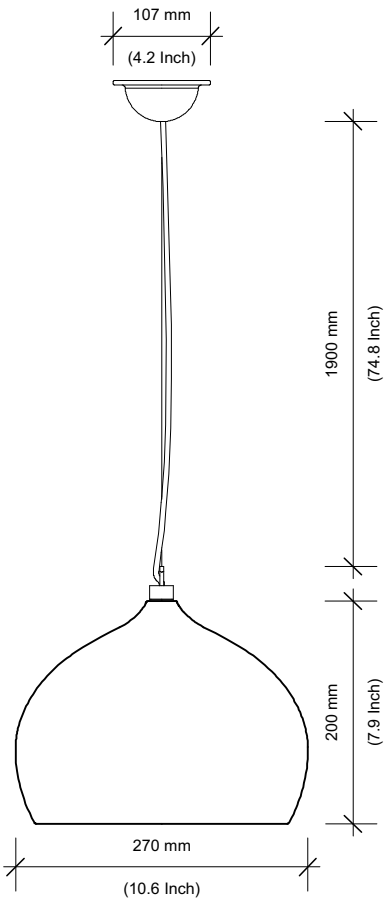

Dimensions- Bottom view

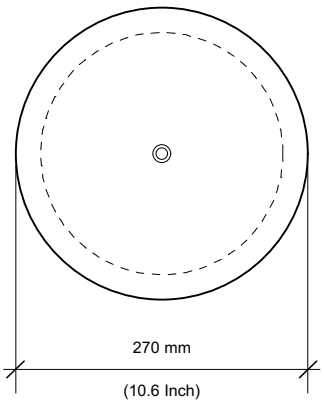

Design by
Thomas Housden

Material & finish
Earthenware & gloss white glaze

Dimensions & weight
Ø270mm, H.200mm, 2.5kg
Ø10.6inch, H.7.9inch, 5.5lb

Lamp type & wattage

- E27 lamp Max 12W LED (bulb not included)
- USA- E26 lamp Max 12W LED (bulb not included)
- Dimmable (if used with compatible dimming controls and bulbs)

IP rating
IP20

Wiring certification
CE, EN60598

Lighting for all the senses.

info@handandeyestudio.co.uk
handandeyestudio.co.uk

©2019

Hand & Eye

Super White Medium
Safety Information EU/USA

- Please read the instructions before assembly or installation.
- Be sure to use a suitably qualified person for installation as the lights require connecting to mains power
- Install the light in conformity to all relevant local building codes and standards
- Make sure mains power is off during installation
- Make sure that the light is securely hung from the ceiling and that there is a suitable substrate for this. The weight of the lamp needs to be taken by the suspension wire not the electrical flex.
- When attaching the ceiling rose ensure you are working from a safe platform or ladder
- Do NOT use an electric screwdriver to tighten the ceiling rose screws as this can cause it to crack
- Do NOT use a light bulb of more than 12W. We recommend using an opal LED light bulb.
- Take care with the ceramic shade as this can break if hit hard enough. We recommend installing the lamp above furniture such as tables or island units or above head height.
- If at any point your light bulb breaks then, as with any light, do not touch the filament/LED part unless the power is turned off
- Always turn off the power before changing a light bulb

info@handandeyestudio.co.uk
handandeyestudio.co.uk

©2019

Hand & Eye

Super White Medium

Assembly Instructions EU/USA 1/2

Diagram 1
Lamp components

1. Electric flex with woven fabric sheathing
2. Suspension wire
3. Brass Hook
4. Metal & rubber washers
5. Lamp shade
6. E27 lamp holder (E26 USA)
7. E27 (E26 USA) Light bulb max 12LED (not supplied)

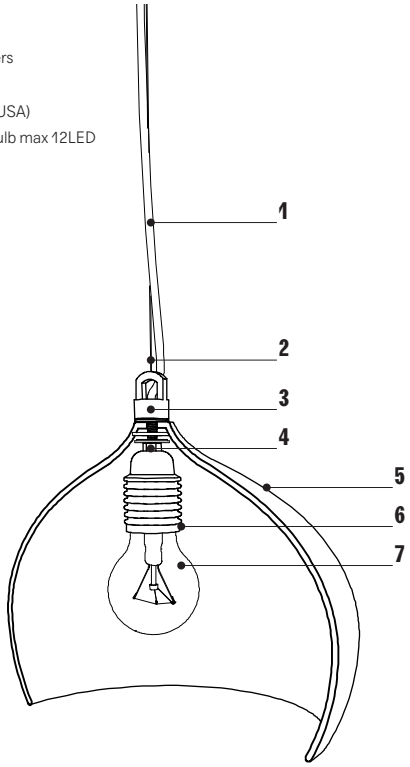

Diagram 2
Ceiling rose components

a. Electrical flex
b. Suspension wire
c. Ceramic ceiling rose (screws not supplied)
d. Flex grommet
e. Electrical junction box
f. Ceiling clamp

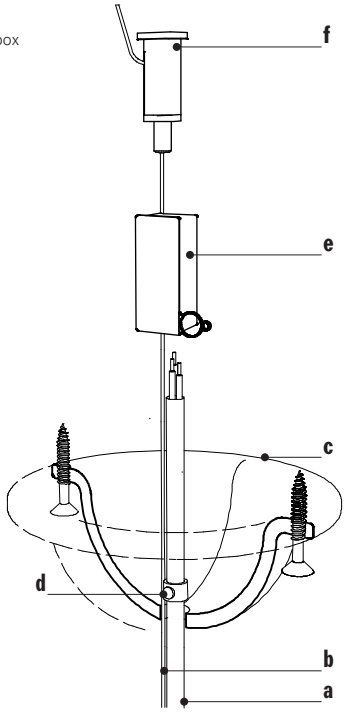

Steps

1 Check lamp components
The lamp set will arrive fully assembled as in diagram 1.

2 Choose hanging height
Decide on the hanging height and cut the flex (1) if necessary. To prevent fraying, tape the fabric with electrical tape after cutting and ensure the sheathing is not slack on the flex. Ensure electric cables have been suitably prepared for connection.

Note!

- We recommend holding the lamp up and testing the lamp height visually before cutting the flex!
- Allow a small amount of extra flex (approx 50mm / 2 Inch) to allow some tolerance and adjustability).

3 Assemble the ceiling rose (canopy)
Thread the flex (a) and the suspension cable (b) through the ceiling rose (c). Place a flex grommet (d) on the top of the flex and secure. This will be used to set the amount of slack on the flex once installed. See diagram 2.

Note!

- A second flex grommet is included in case you want to use this to connect the steel wire with the flex to keep them close or create a swagged effect. If you wish to use this, then you should place this onto the steel wire and flex BEFORE threading these through the ceiling rose.

4 Prepare the ceiling
USA - Install a Raco 4" octagonal Raco metal ceiling box ensuring it is suitably secured according to the manufacturer's instructions. The back box will need to support the weight of the lamp.

EU - Ensure a suitable substrate and fixing points are available to fix the lamp to. We recommend a plywood pattress behind the plasterboard or heavy duty plasterboard fixings.

5 Attach the ceiling clamp
Fix the ceiling clamp to the ceiling or back box. Insert a suitable screw (h) - not supplied- through top part of the ceiling attachment (g). Ensure the screw is fitted to a suitable substrate capable of taking the lamp's weight.

Lighting for all the senses.

info@handandeyestudio.co.uk
handandeyestudio.co.uk

©2019

Hand & Eye

Super White Medium Assembly Instructions EU/USA 2/2

Diagram 3

Ceiling attachment components

g. Top part of ceiling attachment

h. Screw (not supplied)

j. Clamp (Bottom part of ceiling attachment)

k. Clamp 'nipple'

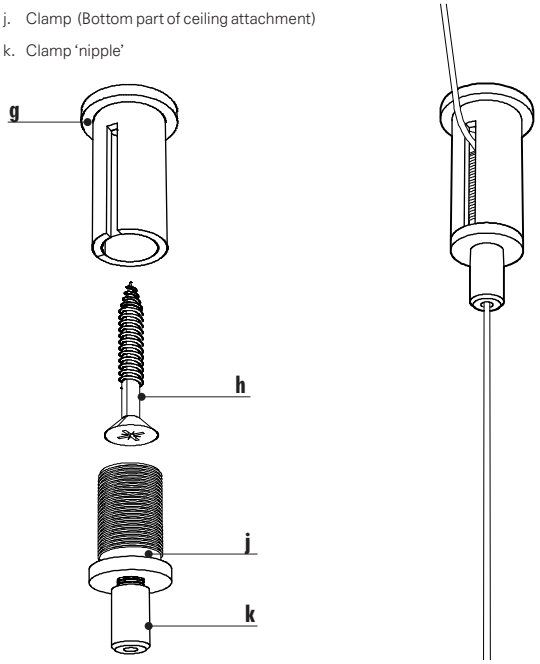

Diagram 4

Final ceiling rose assembly EU / USA

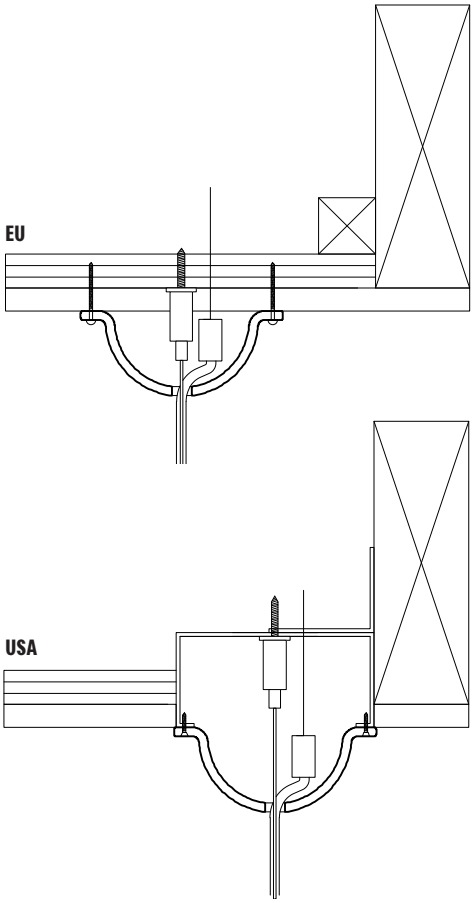

6 Hang the lamp

Thread the suspension cable (b) through the super clamp (to push the wire cable into the clamp the nipple must be loosened by untwisting, then the cable can easily be pushed through. To adjust the cable, push up on the nipple whilst pulling the cable). The excess suspension cable should emerge from the side of the fitting.

Adjust the height of the lamp. Once it is at the correct height tighten the clamp nipple (twist it closed). Then adjust the flex grommet on the end of the electrical flex to adjust to modify the amount of slack.

Note!

- The weight of the lamp must be fully supported off the suspension cable. No weight should be placed on the electrical flex/connection.

7 Connect the power

Now that the lamp is securely hanging from the ceiling connect the mains power cable to the flex using the electrical connector box provided.

8 Attach the ceiling rose (canopy)

USA - Connect the canopy to the 4 inch octagonal Raco ceiling back box using suitable screws. See diagram 4

UK / EU - Connect the ceiling rose to the ceiling using suitable screws and ensure the substrate is suitable or suitable plasterboard fixings are used. See diagram 4

Note!

- Do NOT use an electric screw driver and do NOT over tighten the screws as this can cause the ceiling rose to crack!
- Aesthetically, we recommend brass screws with dome heads for securing the ceiling rose.
- No weight should be taken by the ceramic ceiling rose (canpoy)

9 Light bulb

Fit a screw in bulb to the lamp holder (5) making sure not to apply a sideways force on the pole (3). Ensure the use of Max 12W LED bulb.

Lighting for all the senses.

info@handandeyestudio.co.uk
handandeyestudio.co.uk

©2019