Hand & Eye

Io Wall
Instructions & Safety Information EU/USA

Dimensions- Front view

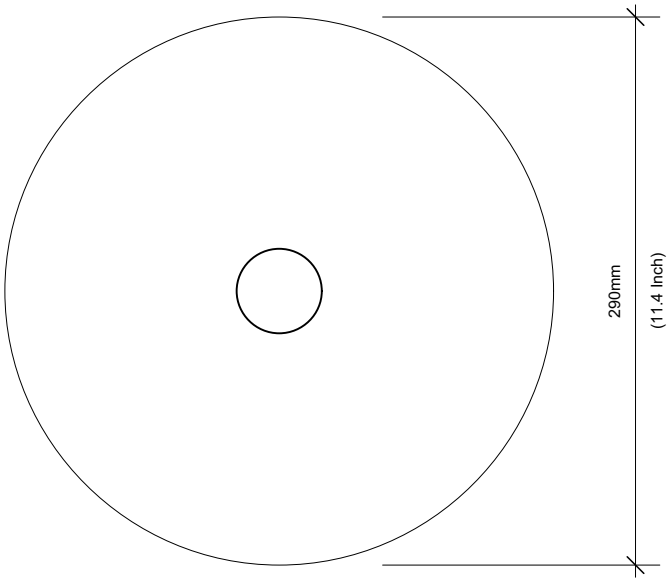

Dimensions- Side view

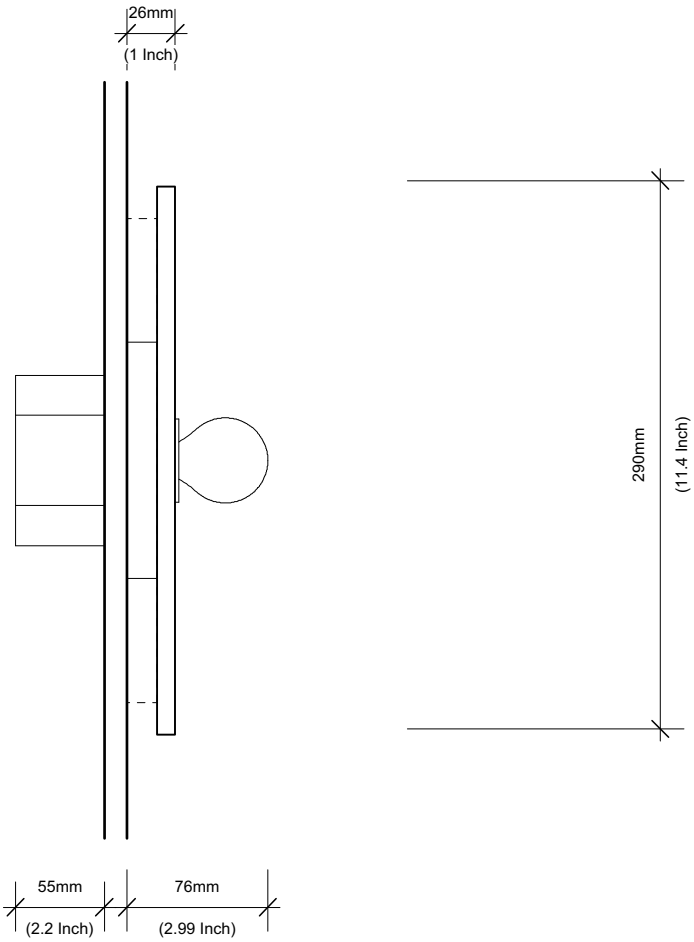

Design by
Thomas Housden

Material & finish
Recycled ceramic and glass ‘stone’ shade
Aluminium mounting plate

Colour options
Desert / Dust / Smoke

Dimensions & weight
Ø 290mm, D 75mm from wall, 1.8-2.1kg
Ø 3.14 inch, H 5.11 inch, 13.6lb
Wall Back Box (not supplied) - Min 55mm depth

Light source
Front illumination:
EU - 1 x E14 3W LED (Tala Porcelain I bulb supplied), 230v AC 50 Hz
USA - 1 x E12 3W LED (bulb not supplied) 120v AC 60Hz
(Recommended bulb is the Porcelain I by Tala)

Certification

IP rating: IP20
Certification: CE EN-60598

Lighting for all the senses.

info@handandeyestudio.co.uk
handandeyestudio.co.uk

©Jan 2025

Hand & Eye

Io Wall
Safety Information EU

- Please read the instructions before assembly or installation.
- Make sure mains power is off during installation.
- Be sure to use a suitably qualified person for installation as the lights require connecting to mains power.
- Install the light in conformity with all relevant local building regulations/codes and standards.
- Make sure the wall is suitably prepared to ensure a solid fixing method and substrate.
- The recycled ceramic shades is breakable and should be treated suitably.
- Do NOT bring the light in contact with water or locate the lamp in a wet location.
- The recomended bulb is the Tala Porcelain I. Please contact Hand & Eye or Tala for replacements.
- If the lamp (bulb) needs to be replaced, we recommend removing the bulb only when the new bulb is ready for installation.
- Note that the light requires a wall recess / back box.
- If any cable is damaged, this should only be replaced by the manufacturer or a similarly qualified person.
- Used electrical equipment (WEEE) should not be mixed with general household waste. Please recycle. Our products can be dismantled prior to disposal.

Contact
Hand and Eye Studio Ltd
UK company number: 7587679
Email: info@handandeyestudio.co.uk
Tel: +44 (0) 1548 550675

EU Authorised Representative:
Artisan Home Collection SL
4 calle de la Iglesia, 18710 Polopos (Granada), Spain
Company number: B75241851
Contact telephone: +34 665250276
Contact email: orders@thefrenchhouse.net

©Jan 2025

Hand & Eye

Io Wall
Assembly Instructions
1/3

Diagram 1
Lamp components

1. EU - LED E14 lightbulb (3w)
   USA - LED E12 lightbulb (3w)
2. Fixing insert
3. Recycled ceramic and glass shade
4. Back plate
5. Lamp holder + cable
6. Back box (not supplied)
   USA - Allow 4 inch Raco
   EU - optional

Steps

1 Preparation

The Io wall light comes with components 4 & 5 pre-assembled.

The following things will need to be sourced before installation:

- A back box if required under local building regulations of suitable depth.
- Screws and wall plugs for mounting back plate if NOT using back box

We recommend having the following tools:

- Drill suitable for wall substrate
- Wire stripper & cutter
- Screw driver
- Tape measure & pencil

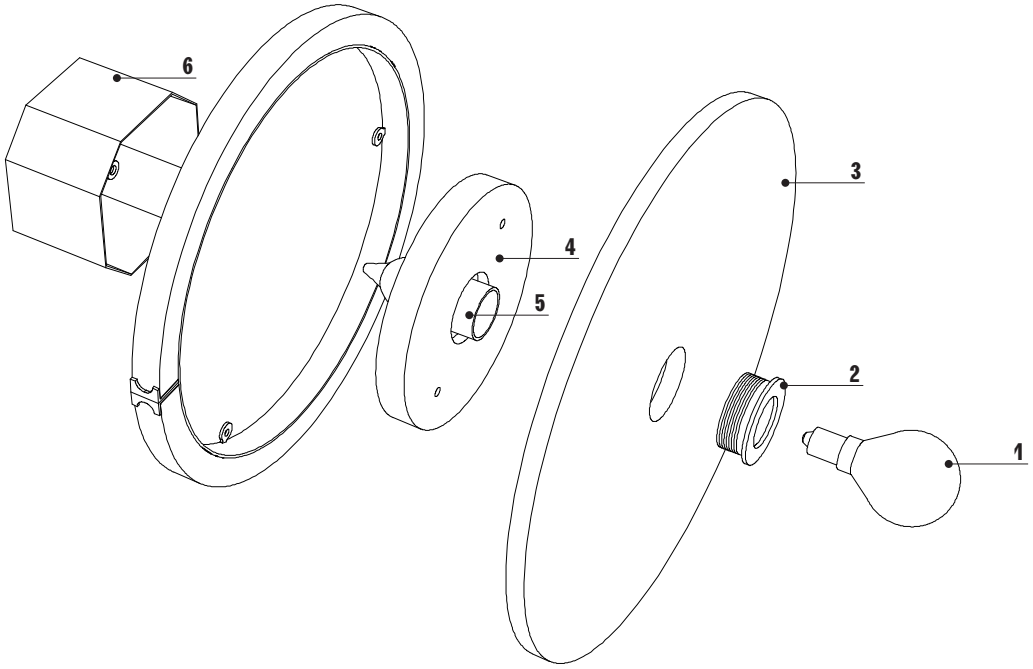

info@handandeyestudio.co.uk
handandeyestudio.co.uk

©Jan 2025

Hand & Eye

Io Wall
Assembly Instructions
2/3

Diagram 2
Assembly Step 2-5

4. Back plate
5. Lamp holder
6. Back box (not supplied)
8. Connector blocks(s)
9. Wall
10. Screws (not supplied)

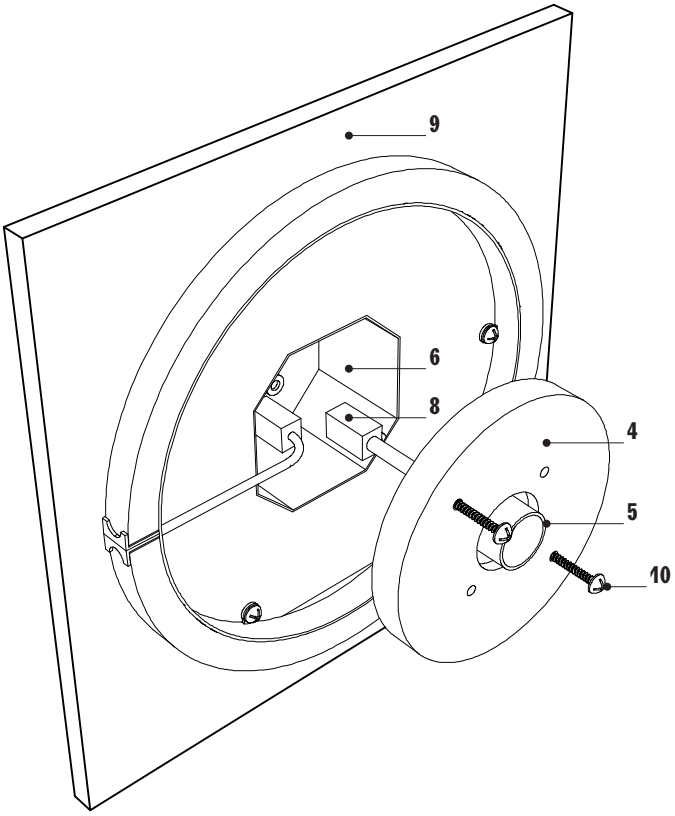

Diagram 3
Electrical Wiring Diagram

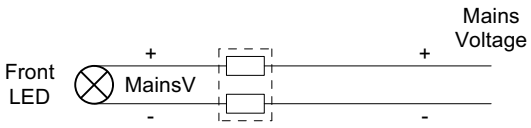

2 Attach back box to wall

The Io wall light is designed to be installed using a deep back box allowing the lamp holder to be recessed into the wall.

In the USA the lamp is designed to operate with a deep 4" Raco metal back box (with screw holes at 90mm centres)

In the UK / EU the lamp can be used with a deep back box with 60mm screw centres. Ensure all back boxes are a minimum of 50mm deep.

Note!

- Install the back box to manufacturers recommendations.
- Ensure the back box is adequetly secured to the wall to accomodate the weight of the lamp
- If local building codes allow, the back box can be omitted.

3 Connecting the Power

Connect cables to the mains power using the supplied connector block (8). See diagram 3.

4 Attach back plate

Using countersunk screws (10), secure the metal back plate (4) to the back box (7) using either the USA (90mm) or EU (60mm) located holes. Alternatively screw directly to wall with suitable wall plugs without a back box if local codes permit.

Ensure the screw heads are flush to the face of the back plate and that the plate is securely fitted to the wall.

info@handandeyestudio.co.uk
handandeyestudio.co.uk

©Jan 2025

Hand & Eye

Io Wall

Assembly Instructions EU 3/3

Diagram 4

Assembly Steps 6

2. Fixing insert
3. Recycled ceramic and glass shade

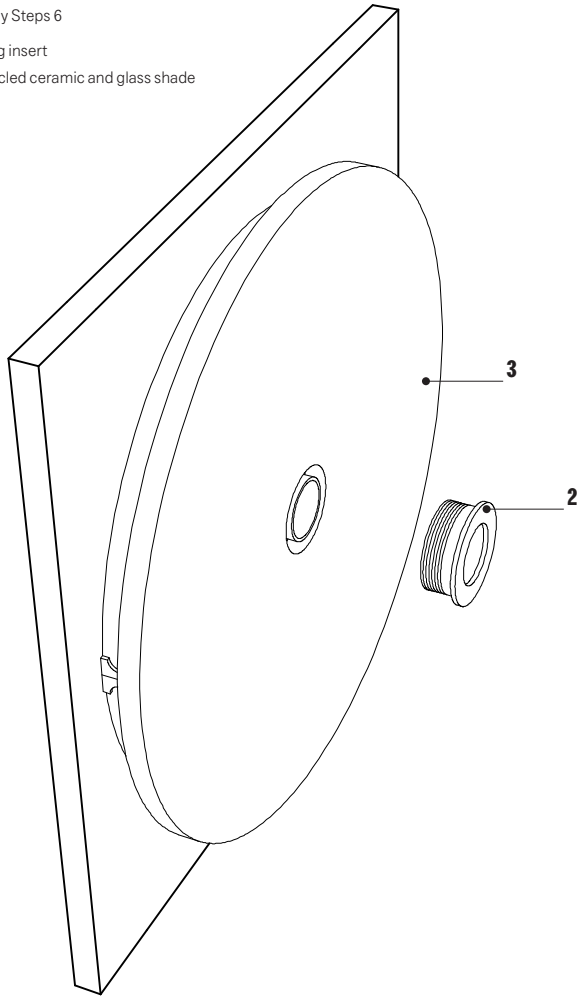

Diagram 5

Assembly Step 7/8

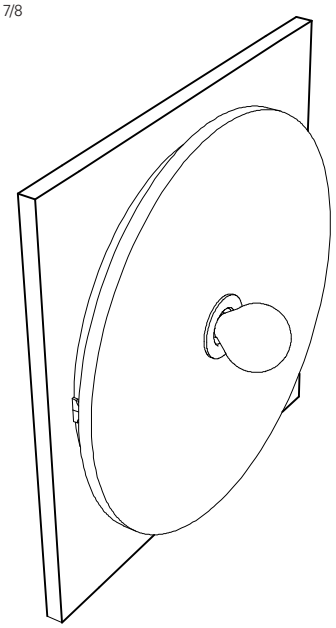

6 Attaching the recycled ceramic & glass shade

Now locate the recycled ceramic and glass circular shade (2) over the metal back plate (4). Insert the fixing insert (2) and gently screw in to the back plate (4). The insert should be finger tight and hold the disc in place.

7 Attach the light bulb

Now insert the supplied LED light bulb by gently threading in to the lamp holder. The light bulb should be clear of the ceramic shade.

8 Final Assembly

The light should be fully assembled now. Check it is working correctly and enjoy.

Lighting for all the senses.

info@handandeyestudio.co.uk
handandeyestudio.co.uk

©Jan 2025