Hand & Eye

Mütze Wall Light IP44 Instructions & Safety Information EU/UK

Design by
Thomas Housden

Material & finish
- Solid raw brass wall fitting
- Matt glass in opal as light diffuser
- Terracotta shade glazed internally

Dimensions & weight
Ø160mm, H.155mm, Projection 165mm, 1kg

Lamp type & wattage

- G9 lamp holder, max 6W LED (bulb not included)
- Dimmable
  (if used with compatible dimming controls and bulbs)

IP rating / ceritication
UK/UK version:
- IP44 with rubber gasket to rear
- CE / UKCA

Dimensions- Side View

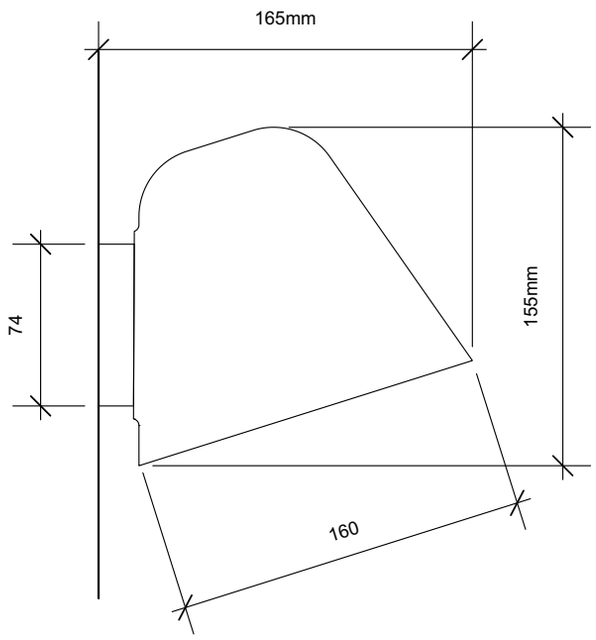

Dimensions- Front View

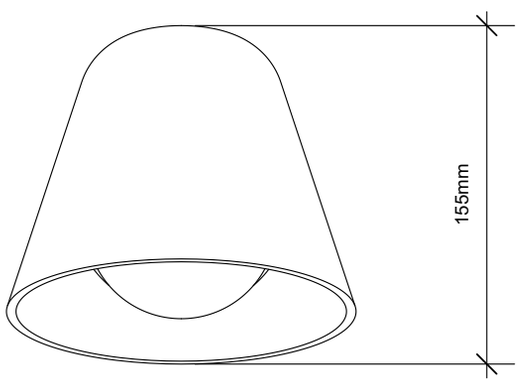

Dimensions- Top View

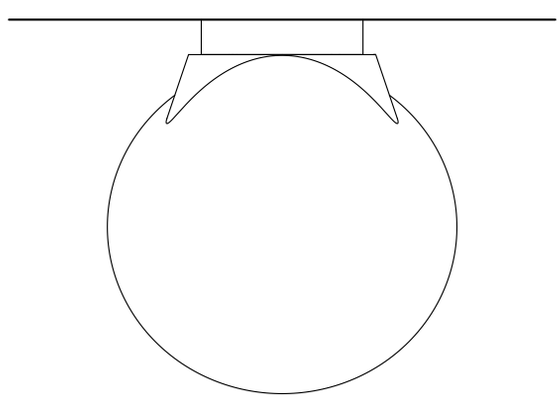

Lighting for all the senses.

info@handandeyestudio.co.uk
handandeyestudio.co.uk

©Oct 2026

Hand & Eye

Mütze Wall Light IP44
Safety Information EU/UK

- Please read these instructions IN FULL and carefully BEFORE commencing assembly and installation.
- We recommend the use of a professional trades person with suitable qualifications for the installation of electrical lights.
- Install the light in conformity with all relevant local building codes and regulations.
- Make sure mains power is off during installation.
- Make sure that the light is securely mounted to the ceiling or wall and that there is a suitable substrate for this.
- Ensure you are working from a safe platform or ladder if working at height.
- Do NOT use a lightbulb of more than 6W.
- Take care with the ceramic and glass shades as this can break if it is hit hard enough.
- If at any point your lightbulb breaks then, as with any light, do not touch the filament/LED part unless the power is turned off
- Always turn off the power before changing a lightbulb.
- Used electrical equipment (WEEE) should not be mixed with general household waste. Please recycle. Our products can be dismantled prior to disposal.

Contact
Hand and Eye Studio Ltd
UK company number: 7587679
Email: info@handandeyestudio.co.uk
Tel: +44 (0) 1548 550675

EU Authorised Representative:
Artisan Home Collection SL
4 calle de la Iglesia, 18710 Polopos (Granada), Spain
Company number: B75241851
Contact telephone: +34 665250276
Contact email: orders@thefrenchhouse.net

©Oct 2026

Hand & Eye

Mütze Wall Light IP44 Instructions EU/UK 1/2

Diagram 1
Exploded view of the Wall Light

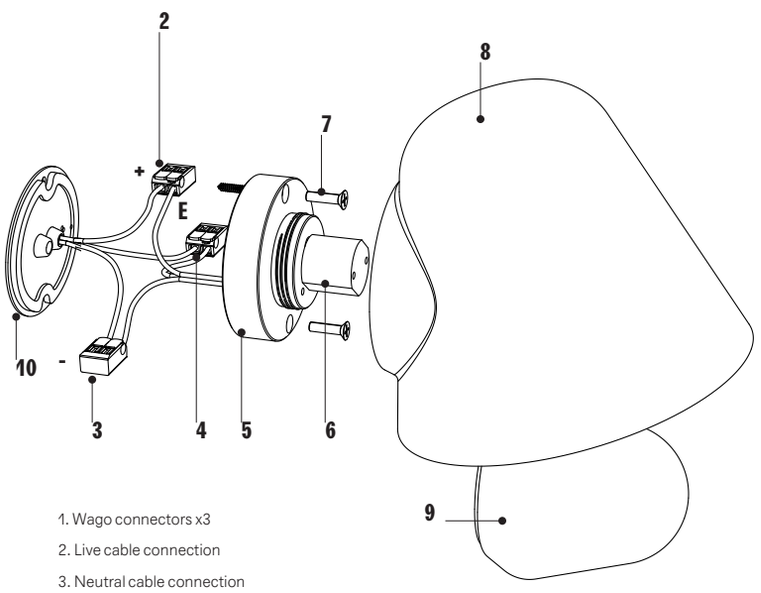

1. Wago connectors x3
2. Live cable connection
3. Neutral cable connection
4. Earth termination cable connection
5. Brass wall mount
6. G9 lamp holder
7. Screws for wall connection x2
8. ceramic shade
9. Glass shade and pre attached threaded metal attachment
10. Flexible rubber IP wall gasket

Diagram 2
Electrical connections and attaching to the wall

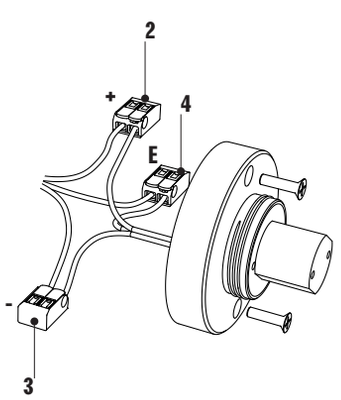

Attaching & connecting the light

Steps

1 Prepare the wall

Make sure the wall location has been suitably prepared allowing for a secure fixing substrate that can take the weight of the light. We recommend the light is fixed to a timber / timber pattress behind the wall.

2 Install Flexible IP Wall Gasket / Electrical Connections

Pull mains cable through one of the two cable ports on the flexible IP Wall Gasket. If daisy chaning use second hole to exit lamp. If second hole is not used infill with silicone!

Connect the pre -installed electrical cables to the mains supply using the Wago connectors and ensuring the correct polarity (see diagram 3).

Connections and excess cables can be housed in the brass wall mount.

Note!

- Always use a professional electrician
- Ensure the mains electrics are OFF prior to making the electrical connections
- Ensure cable hole on flexible IP Wall Gasket are siliconed closed if not used.

3 Secure the brass wall mount

Now that the connection has been made the brass wall mount can be secured to the ceiling or wall. The provided wall screws are supplied as an example, ensure suitable screws / fixing method are used depending on your wall substrate!

The wall mount should be flush to the wall and no movement should occur.

Note!

- Align the brass backplate with the flexible IP Wall Gasket and ensure this clicks into place on the brass closing the back of the plate to any water ingress. Ensure the second cable hole is siliconed shut if not in use.

info@handandeyestudio.co.uk
handandeyestudio.co.uk

©Oct 2026

Hand & Eye

Mütze Wall Light IP20
Instructions EU/UK
2/2

Diagram 3

Wiring diagram

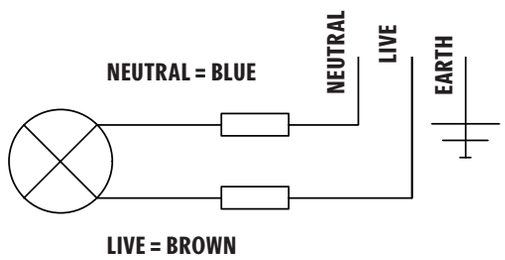

Diagram 4

Attaching the bulb

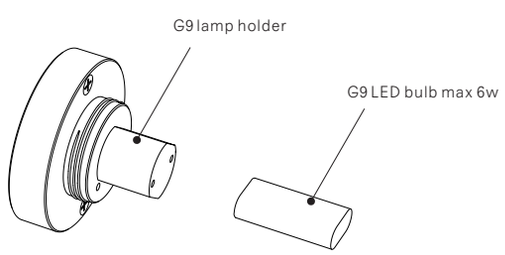

Diagram 5

Attaching the ceramic shade and glass diffuser

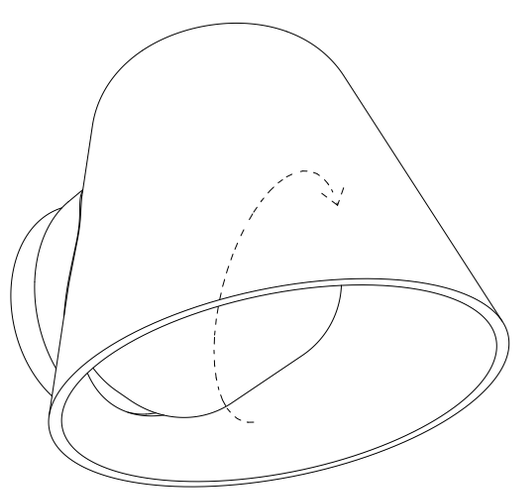

5 Unpacking the ceramic shade

Carefully remove the ceramic shade and the glass lamp diffuser from the packaging. During installation be careful not to scratch or scrape the ceramic or glass with any metal tools such as screw drivers as these can leave marks on the glass.

6 Fitting the ceramic shade with the glass diffuser

The glass shade comes fitted with a brass collar which screws onto the brass wall mount. Locate the ceramic shade onto the brass wall mount, inserting the light bulb carefully through the opening in the ceramic. Now fit the glass diffuser by gently turning clockwise keeping the glass parallel to the wall mount.

When the lamp meets the end of the ceramic shade stop turning the shade. Do not force or overtighten.

7 Protecting the lamp

If further works are taking place on-site, protect ceramic and glass from damage or dirt.

Note that both ceramic and glass parts can be removed for thorough cleaning. Use water and a gentle dish washing liquid if needed, rinse and allow to dry completely before replacing.

8 Adjusting shade Direction

The terracotta shade can be fixed in place at different angels as desired. Simply rotate the shade to desired location and lock in place with the glass diffuser to finger tight. DO NOT overtighten.

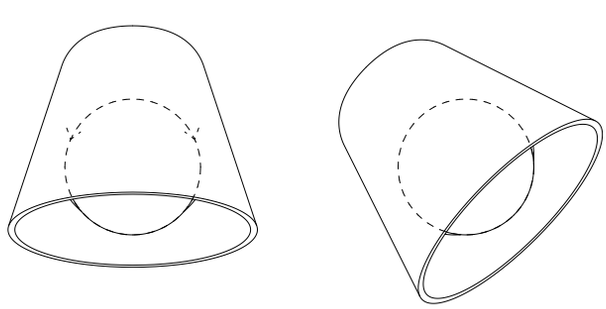

Lighting for all the senses.

info@handandeyestudio.co.uk
handandeyestudio.co.uk

©Oct 2026