Hand & Eye

Mütze Wall Light Instructions & Safety Information USA

(Uni-Wall-MUT)

Dimensions- Side View

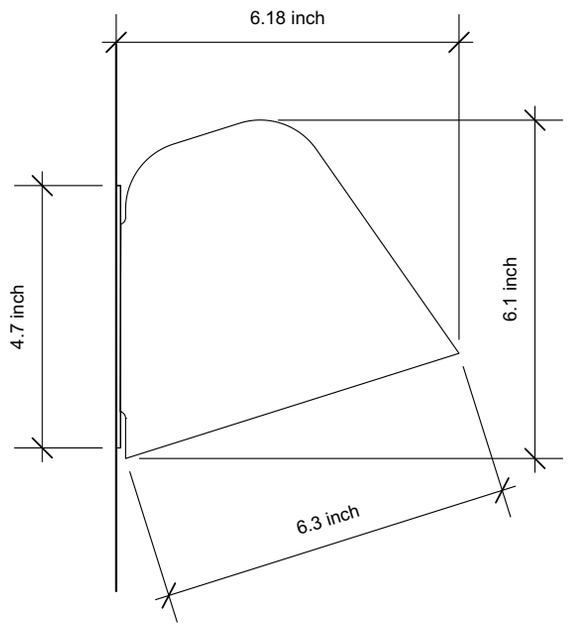

Design by

Thomas Housden

Material & finish

- Solid raw brass wall fitting
- Matt glass in opal as light diffuser
- Terracotta shade glazed internally

Dimensions & weight

Ø 6.3inch, H. 6.18inch, Projection 6.3 inch 2.2lb
(US version)

Lamp type & wattage

- G9 lamp holder, max 6W LED (bulb not included)
- Dimmable
  (if used with compatible dimming controls and bulbs)

IP rating / certification

- UL / cUL

- Damp Locations

Dimensions- Front View

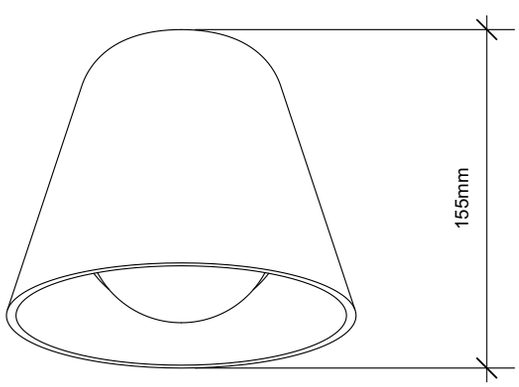

Dimensions- Top View

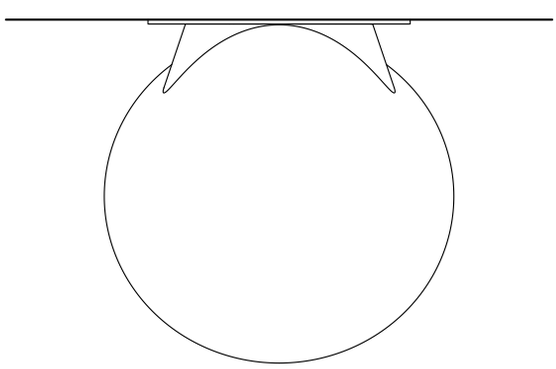

Lighting for all the senses.

info@handandeyestudio.co.uk
handandeyestudio.co.uk

©Oct 2026

Hand & Eye

Mütze Wall Light
Safety Information USA
(Uni-Wall-MUT)

- Please read these instructions IN FULL and carefully BEFORE commencing assembly and installation.
- We recommend the use of a professional trades person with suitable qualifications for the installation of electrical lights.
- Install the light in conformity with all relevant local building codes and regulations.
- Make sure mains power is off during installation.
- Make sure that the light is securely mounted to the wall and that there is a suitable substrate for this.
- Ensure you are working from a safe platform or ladder if working at height.
- Do NOT use a lightbulb of more than 6W. Do NOT use halogen lightbulbs.
- Take care with the ceramic and glass shades as these can break if it is hit hard enough.
- If at any point your lightbulb breaks then, as with any light, do not touch the filament/LED part unless the power is turned off
- Always turn off the power before changing a lightbulb.
- Used electrical equipment (WEEE) should not be mixed with general household waste. Please recycle. Our products can be dismantled prior to disposal.

info@handandeyestudio.co.uk
handandeyestudio.co.uk

©Oct 2026

Hand & Eye

Uni-Wall-MUT
Mütze Wall Light
Instructions USA
1/2

Diagram 1
Exploded view of the Melina Wall Light

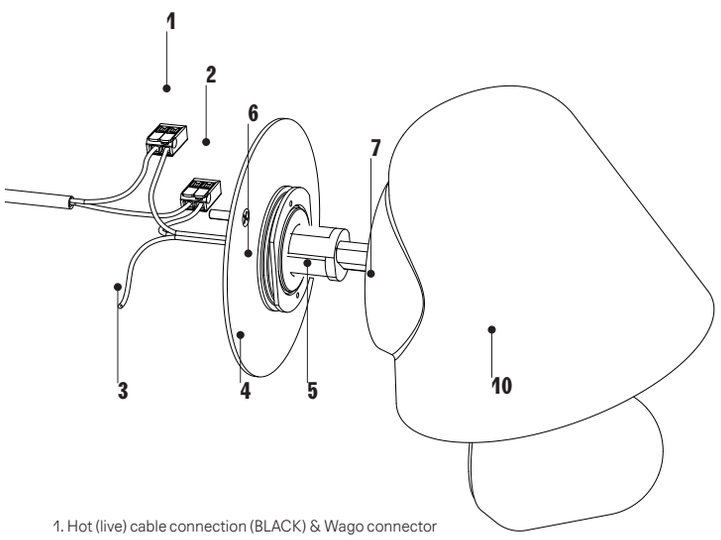

1. Hot (live) cable connection (BLACK) & Wago connector
2. Neutral cable connection (WHITE)
3. Ground termination cable connection
4. Brass wall disc
5. G9 lamp holder and threaded aluminum connector
6. Screws for connection to 4 inch Raco outlet box
7. G9 LED lightbulb (not supplied)
8. Glass shade and pre attached threaded metal attachment collar
9. US trade size 4 octagonal outlet box
10. Ceramic shade

Diagram 2
Electrical connections and attaching to the wall

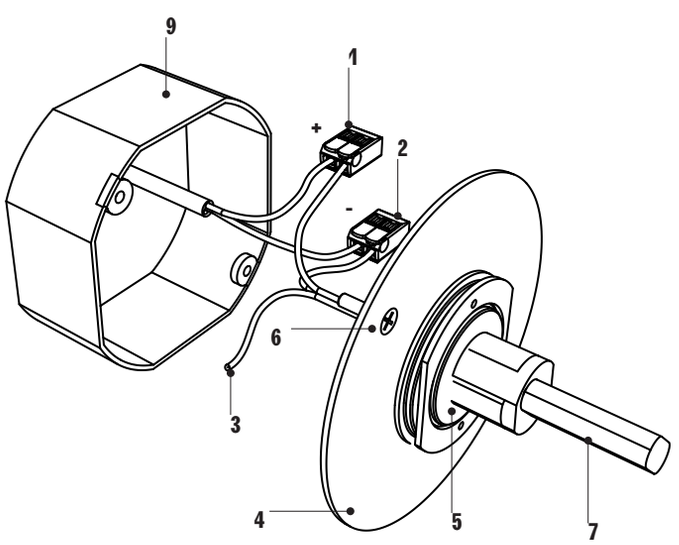

Attaching & connecting the light

Steps

1 Prepare the wall
Make sure the wall location has been suitably prepared allowing for a secure fixing substrate that can take the weight of the light. Brass disc screws align with a Raco 4inch outlet box.

2 Connect to mains electrics
Connect the pre -installed electrical cables to the mains supply using the Wago connectors and ensuring the correct polarity.

Note!

- Always use a professional electrician
- Ensure the mains electrics are OFF prior to making the electrical connections

3 Secure the brass wall mount
Now that the connection has been made the brass wall disc can be secured to the outlet box.

4 Connect the light bulb
Select a suitable G9 LED light bulb with a maximum of 6W output. For a warm glow we would recommend a 2700K and for a cooler white glow a 3000K light bulb. Push in the bulb and test the lamp is working prior to the next step. Do NOT use halogen lightbulbs.

info@handandeyestudio.co.uk
handandeyestudio.co.uk

©Oct 2026

Hand & Eye

Uni-Wall-MUT
Mütze Wall Light
Instructions USA 2/2

Diagram 4

Attaching the bulb

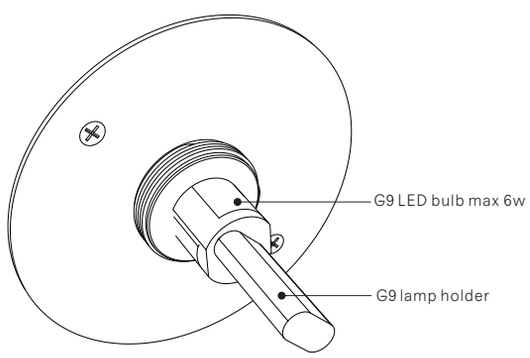

Diagram 5

Attaching the glass shade

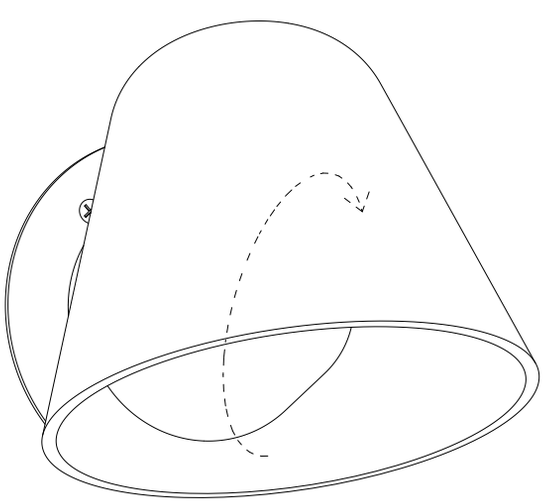

5 Unpacking the ceramic shade

Carefully remove the ceramic shade and the glass lamp diffuser from the packaging. During installation be careful not to scratch or scrape the ceramic or glass with any metal tools such as screw drivers as these can leave marks on the glass.

6 Fitting the ceramic shade with the glass diffuser

The glass shade comes fitted with a brass collar which screws onto the brass wall mount. Locate the ceramic shade onto the brass wall mount, inserting the light bulb carefully through the opening in the ceramic. Now fit the glass diffuser by gently turning clockwise keeping the glass parallel to the wall mount.

When the lamp meets the end of the ceramic shade stop turning the shade. Do not force or overtighten.

Note!

- When the lamp meets the end of the thread stop turning the shade. Do not force or overtighten!
- The Mütze shade can be positioned at different angles to suit asnd lock the ceramic shade in place with the glass diffuser by twisting. Ensure not to overtighten!

7 Protecting the lamp

If further works are taking place on-site, protect ceramic and glass from damage or dirt.

Note that both ceramic and glass parts can be removed for thorough cleaning. Use water and a gentle dish washing liquid if needed, rinse and allow to dry completely before replacing.

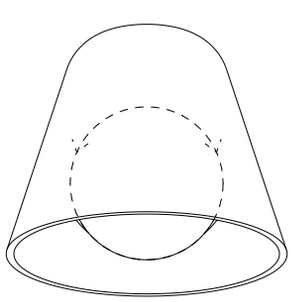

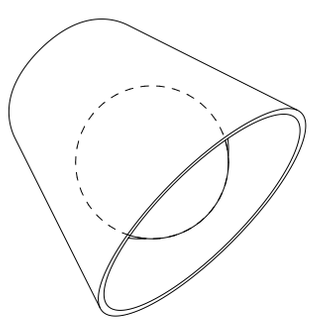

Lighting for all the senses.

info@handandeyestudio.co.uk
handandeyestudio.co.uk

©Oct 2026